

- RMS measure AC + DC hardened version:**

Single-phase or balanced three-phase 0...440 Hz  
with or without neutral  
PWM, wave train,  
Phase angle variation,  
high level harmonics signals

- multi-sensor for current measurement:**

Shunt, Rogowski coil,  
Hall effect sensor

- Programmable:**


Voltmeter, ammeter, wattmeter, varmeter,  
power factor, Cos phi, frequency meter

- 4 digits measure display**

U, I, Cos, P, Q, Hz

- 2 isolated analog outputs and 2 relay outputs**

- Wide range universal ac/dc power supply**

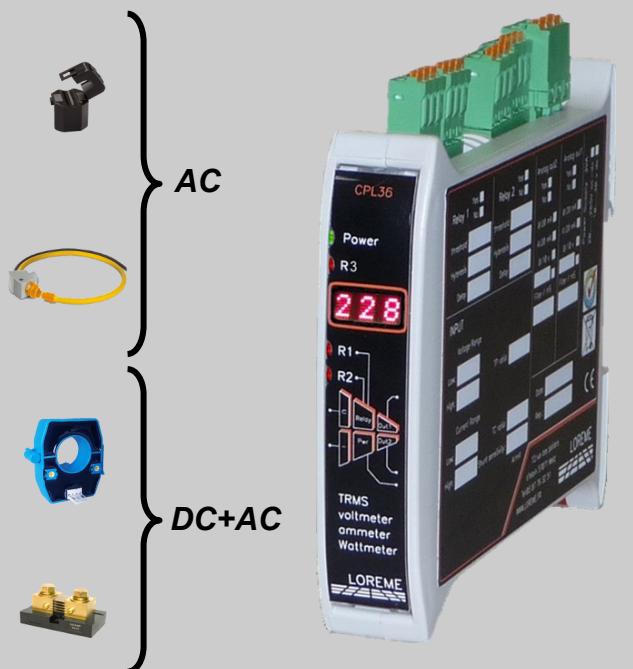

The CPL36 is a hardened converter for measuring, monitoring and retransmission of electrical parameters. Implementation is fast by simple configuration of ratio transformer or shunt sensitivity. The various output options allow a wide range of application.

**Measurement:**

- DC or AC network, single-phase or three-phase with neutral (configurable PT and CT ratio or shunt sensitivity),
- 600V voltage input range,
- 3 current input ranges: 250mV (external shunt)
- current by Hall effect sensor (+/-4V nominal input, +/-10V peak)
- active power (P), reactive power (Q), apparent power (S),
- cos φ (power factor), frequency 1Hz.....440 Hz,
- configurable integration time from 10 ms to 60 seconds for the measurement in slow waves train applications.

**Front face:**

- 4 digit alphanumeric LED matrix display for the measurement
- 2 red LEDs for relay status indication
- 2 push buttons for:
  - \* The fully configuration of device
  - \* Selection of displayed value (U, I, Cos, P, Q, S, Hz)
  - \* Setting of alarm thresholds, .....

**Relays (/R option):** Up to 2 configurable relays:

- In alarm with monitoring measure : U, I, Cos, P, Q, S, Hz,
  - Threshold, direction, hysteresis and delay individually adjustable on each relay (on & off delay),
- HOLD function (alarm memorization with RESET by front face)

**Analog output (/S option):**


- up to 2 isolated analog outputs, fully configurable:  
type and measure range to monitor: U, I, Cos, P, Q, S, Hz,  
type and output range (0 ... 10Volt, 0 ... 4 ... 20mA),  
+/-10V output with coupling the two outputs,  
Response time (filter), limitation set ... for each outputs.

**Configuration:**

The CPL36 can be configured via the front face or via the RS232 link.  
(USB cable -> 3.5 jack available separately)  
- Firmware update is possible via this USB-serial link.

**Feature:**

- 23 mm width case, DIN rail mounting (symmetrical),
- protection rating: IP20,
- pluggable terminals block,
- Hinged front face (buttons and serial access),
- conformal coating,

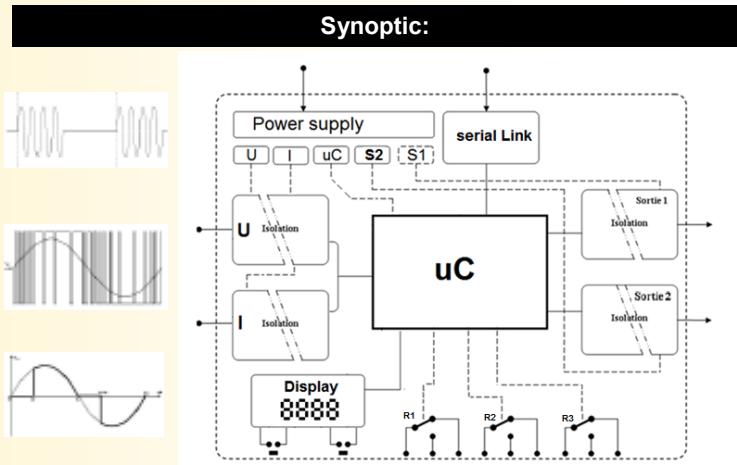


Version and order code:

[Request a quote](#)

**CPL36-Hall** 1 analog output, shunt and voltage inputs  
Input for split core Hall effect sensor. Type: HcO

**CPL36-Hall/R1 + 1 relay**  
**CPL36-Hall/R2 + 2 relays**  
**CPL36-Hall/S2 2 analog outputs**

**CPL36-Rogo** Input for Rogowski coil.  
Type: Rogoflex LT (Up to 2000 Arms)

| INPUT   |  |  | ANALOG OUTPUT  |   |   |
|---|--|--|--|---|---|
| TYPE<br>ac voltage<br>dc voltage<br>Input impedance<br>Overload<br>Measure Threshold<br>Power consumption | RANGE<br>600Vac<br>900Vdc<br>2Mohms<br>3 x full range during 3 s<br>0.5% of full range<br>0.12 W | ACCURACY<br>+/- 0.3% full range<br>+/- 0.3% full range | TYPE<br><b>current</b> S1 and S2:<br>permissible load:<br><b>voltage</b> S2 and S2:<br>output impedance: | RANGE<br>0 ... 4 ... 20 mA<br>0 ....850 Ohms<br>0 ... 10 V<br>500 Ohms (internal shunt 0.1%)<br>or 1 bipolar output<br>-10V ... +10V (2 outputs coupling) | ACCURACY<br>+/- 20 µA<br>+/- 10 mV  |
| TRMS ac+dc current  | 250mV<br>+/- 0.3% full range<br>+/- 10Vmax for Hall effect sensor<br>(+/-15V sensor supply)      |  |  |   |   |
| Overload  | 6 x In during 3 s  |  |  |   |   |
| Measure Threshold   | 0.5% of full range   |  |  |   |   |
| Frequency   | 1Hz....440 Hz  | +/- 0.2 %  |  |   |   |
| Other input ranges on request.  |  |  |  |   |   |
| Note: use transformer for higher range in AC.   |  |  |  |   |   |
| METROLOGY   |  |  |  |   |   |
| (the accuracies are given in percentage of full scales)   |  |  |  |   |   |
| Active or dc power  | + / - 0.5%   |  |  |   |   |
| Reactive power  | + / - 1% (in % of apparent power)  |  |  |   |   |
| Cos phi   | + / - 0.5%   |  |  |   |   |
| (conditions: freq 45/65 Hz, power factor > 0.7, peak factor 1.4; input range U / I 10 to 90%)             |  |  |  |   |   |
| measures / response time:<br>sampling integrator programmable from 10ms to 60s.                           |  |  |  |   |   |
| RELAYS  |  |  |  |   |   |
| Changeover contact  |  |  |  |   |   |
| AC switching power:<br>6Aac, 250Vac / 440Vac / 1500VA   |  |  |  |   |   |
| DC switching power:<br>(see adjacent graph)----->   |  |  |  |   |   |
| Open contact isolation: 1000Vac   |  |  |  |   |   |
|                         |  |  |  |   |   |
| S0229-B   |  |  |  |   |   |
| Electromagnetic compatibility 2014/30/UE / Low Voltage Directive 2014/35/UE                               |  |  |  |   |   |
| Immunity standard for<br>industrial environments and power station<br><b>EN 61000-6-2 / EN 61000-6-5</b>  |  |  | Emission standard for<br>industrial environments<br><b>EN 61000-6-4</b>                                  |   |   |
| <b>EN 61000-4-2 ESD</b>   | <b>EN 61000-4-8 AC MF</b>  |  | <b>EN 55011</b>  |   |  |
| <b>EN 61000-4-3 RF</b>  | <b>EN 61000-4-9 pulse MF</b>   |  |  |   |   |
| <b>EN 61000-4-4 EFT</b>   | <b>EN 61000-4-11 AC dips</b>   |  |  |   |   |
| <b>EN 61000-4-5 CWG</b>   | <b>EN 61000-4-12 ring wave</b>   |  |  |   |   |
| <b>EN 61000-4-6 RF</b>  | <b>EN 61000-4-29 DC dips</b>   |  |  |   |   |

## WIRING AND OUTLINE DIMENSIONS:

