

- **Current input**  
4...20 mA
- **1 adjustable threshold with multi-turn potentiometer**  
And input loop break detection
- **Positive security**  
Relays activated below the threshold
- **2 electromechanical changeover contact outputs**  
Independent relays
- **Safety Integrity Level: SIL2 / SIL3**  
conform to IEC 61508



The threshold detector DSL1-35mA-SIL is specially suited for security applications, its analog design ensures a high reliability and a perfect mastering of failure modes. It naturally finds its place in safety applications.

#### Description:

#### Input

- 4...20 mA passive current, supports from 0 to 25 mA.  
(without sensor power)

#### Front face

- one 10-turn potentiometer to adjust the detection threshold
- 1 green LED indicating the relay status  
(LED on = relay energized)

#### Operation:

- The two output relays are activated when the measure (4 ... 20 mA signal) is below the threshold set in front of the device.
- The relays fall when the threshold is exceeded or by loss of the input signal (current loop break detection).
- A fixed hysteresis of 1% permits to eliminate a possible beat phenomenon close to the threshold.

#### Feature:

- 35 mm width plastic enclosure with ventilation slots.
- Symmetrical and asymmetrical DIN rail mounting.
- Connection on screw-terminal blocks  
(section of the wires up to 2.5 mm<sup>2</sup>).
- Conformal coating
- Protection rating (enclosure/terminal blocks): IP20

#### Test and qualification

- Accelerated oven aging (burn-in)
- Full traceability of the tests.
- Long-term stability better than 0.5% / year.

#### Recommendations


- Heating time: none
- Horizontal or vertical mounting orientation (no spacing required)

#### Operational safety data:

Type A components, HFT = 0	
$\lambda f$ : 231 fit	(1/MTBF)
DC : 92.6 %	(Diagnostic Coverage)
PFH : 17.1 fit	(Probability of Failure per Hour)
SFF : 94.1 %	(Safe Failure Fraction)



#### Synoptic:

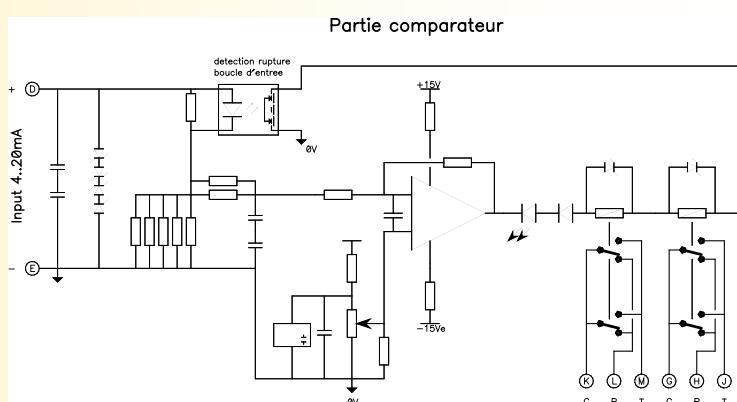

#### Version and order code:

[Request a quote](#)

- **DSL1-35mA-SIL:**

1 threshold / 2 changeover relays  
loop break detection  
SIL2 / SIL3 conform to IEC 61508

INPUT		POWER SUPPLY	
Current mA	4....20 mA	24 Vdc nominal voltage (19 to 29 Vdc power supply range)	
Permissible continuous overload	25 mA	consumption < 1 Watt , Protection against reverse polarity	
Equivalent input impedance	175 Ohms @ 20 mA		
Input drop out voltage	3.5 Vdc typical @ 20mA		
THRESHOLD		ENVIRONMENT	
Typical adjusting range	0 to 25 mA	Operating Temperature	-25 to 60 °C
Accuracy of adjustment	<+/-0.2% (10 turns pot.)	Storage Temperature	-40 to 85 °C
Tripping repeatability	< +/- 0.1 %	Influence	< 0.02 % / °C (% of full scale)
Hysteresis	1% (~ 0.2mA)	Humidity	85 % (not condensed)
Response time	< 20 ms	Insulation resistance	> 1 Gohms @ 500Vdc
Long term stability	< 0.5% / year	Dielectric strength (power supply/input/contact)	1500 Vrms continuous
Loop break detection	Input current = 0 mA	Protection rating	IP20
RELAY		Weight	~92 g
free potential changeover contact	220 Vdc, 250 Vac	MTBF (MIL HDBK 217F)	> 2 000 000 Hrs @ 25°C
Maximum voltage switching	2 A	Life time	> 150 000 Hrs @ 30°C
Maximum current switching	60 W, 62.5 VA	Shock IEC 60068-2-27 (operating)	15 G / 11 ms
Maximum power switching	100 µV	Bump IEC 60068-2-29 (transportation)	40 G / 6 ms
Minimum voltage switching	<50 mΩ @ 10 mA/20 mV	Vibration IEC 60068-2-6 (operating)	1 G / 10 - 150 Hz
Initial contact resistance	10 µV	Vibration CEI 60068-2-6 (transportation)	2 G / 10 - 150 Hz
Thermoelectric potential			
Input withstand voltage (1.2 / 50 µs)			
- Between coil and contacts	3000 Vrms		
- Between open contacts	2500 Vrms		
Minimum lifetime on resistive load	1 x 10 <sup>5</sup> operations		

**Electromagnetic compatibility 2014/30/UE / Low Voltage Directive 2014/35/UE**

Immunity standard for industrial environments EN 61000-6-2	Emission standard for industrial environments EN 61000-6-4
EN 61000-4-2 ESD	EN 61000-4-8 AC MF
EN 61000-4-3 RF	EN 61000-4-9 pulse MF
EN 61000-4-4 EFT	EN 61000-4-11 AC dips
EN 61000-4-5 CWG	EN 61000-4-12 ring wave
EN 61000-4-6 RF	EN 61000-4-29 DC dips

EN 55011

group 1  
class A**WIRING AND OUTLINE DIMENSIONS:**