

• **CAL35CA**

measure converter for alternative signals

sinusoidal signals 50Hz, 60Hz and 400Hz (voltage or current)

• **CAL35RMS** *True rms version (AC)*


DC component suppression

PWM, Phase angle variation,

Wave train,

• **CAL35TRMS**

TRMS measure (AC + DC)

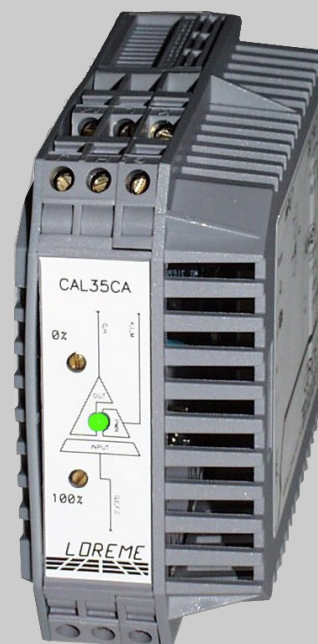

The CAL35CA series of converters transform alternative voltage or current signals in 0...4...20mA or 0...10V output signals proportional to input measurement.

DESCRIPTION:

Measures: (The frequency range must be defined for adjust the integration constant for RMS value)

- Alternative voltage from 100 mV to 600V
- Alternative current from 100uA to 5A on screw terminals
- Alternative currents from 5A to 150A on split-core current transformer type: Tio (frequency range: 45 to 500 Hz).

Outputs:

- Current 0...4...20 mA.
- Voltage 0...10 V.
- Other outputs on request (0 ... 5V, ...).

Feature:

- DIN rail mounting (IP20 enclosure).
- Connecting on screw terminal blocks 2,5 mm².
- 3-way galvanic isolation (input/output/power supply).
- Standard linear or wide range switching mode power supply.
- Customised measure scale.
- Start and end scale adjustment possible by multi-turn potentiometers.
- Over-voltage or over-current protection.

Version and order code :

CAL35CA : - Suitable for sinusoidal alternative signals measurement (50Hz, 60Hz, or 400Hz)

CAL35RMS: - True rms measure (AC)
with DC component suppression
for all not sinusoidal applications or needing a wide bandwidth
0.25Hz ... 50kHz

CAL35TRMS: - True rms measure (AC+DC)
for all not sinusoidal applications or needing a wide bandwidth
0.25Hz ... 50kHz

Direct input

Voltage range	0...100 mV to 0...500 V
Impedance	from 100 kOhms to 10 MOhms
continuous overload	2 VN
Power consumption	< 0.25 W
Current range	0...100uA to 0...5A
Impedance	0.05 ohms @ 5A
continuous overload	1.5 IN
Peak overload	6 IN during 3s
Power consumption	< 0.25 W @ 1A; < 1.25W @ 5A
Frequency range	15 - 500 Hz (CAL35CA)
Integration time	5 ms to 60 s (CAL35RMS & TRMS) dependant of application

OUTPUT

Current	0... (4) ... 20 mA
Max. load	800 Ohms
Voltage	0 - 10 V
Impedance	500 Ohms
Accuracy	+/- 0.5 %
Response time	< 10 ms + input integration time
Residual ripple (noise)	< 30 mV

POWER SUPPLY (to be defined at the order)

230 Vac 50-60 Hz +/- 10 %, 2.3 VA
115 Vac 50-60 Hz +/- 10 %, 2.3 VA
20 to 70 Vac / Vdc, 2.3 VA
80 to 265 Vac / Vdc, 2.3 VA
9 to 30 Vdc, 2 W
Reverse polarity protected

ENVIRONMENT

Operating temperature	-25 to 60 °C
Storage temperature	-40 to +85 °C
drift (% of full scale)	0.05 % / °C
Humidity	85 % not condensed
Weight	200 g
Shock IEC 60068-2-27 (operating)	15 G / 11 ms
Bump IEC 60068-2-29 (transportation)	40 G / 6 ms
Vibrations IEC 60068-2-6 (operating)	1 G / 10 - 150 Hz
Vibrations CEI 60068-2-6 (transportation)	2 G / 10 - 150 Hz
Protection rating	IP20
Recommended mounting direction	Vertical
Dielectric strength	1500 Vac continuous
MTBF (MIL HDBK 217F)	> 4 000 000 Hrs @ 25°C
life time	> 170 000 Hrs @ 30°C

Electromagnetic compatibility 2014/30/UE / Low Voltage Directive 2014/35/UE

Immunity standard for industrial environments EN 61000-6-2		Emission standard for industrial environments EN 61000-6-4
EN 61000-4-2 ESD	EN 61000-4-8 AC MF	group 1 class A
EN 61000-4-3 RF	EN 61000-4-9 pulse MF	
EN 61000-4-4 EFT	EN 61000-4-11 AC dips	
EN 61000-4-5 CWG	EN 61000-4-12 ring wave	
EN 61000-4-6 RF	EN 61000-4-29 DC dips	

**WIRING AND OUTLINE DIMENSIONS:**