

• **Up to 16 measure inputs per module**

Rtd sensor inputs (PT100 , PT1000)
 Thermocouples inputs (J ,K ,S ,T)
 Thermistor CTN , CTP inputs
 0..15....10Volts ; 0...420mA


• **Ethernet Modbus TCP / SNMP link**

6 Modbus TCP concurrent connections
 Bus connection onto the DIN rail
 Embedded Web Server and SNMP protocol

• **RS485 Modbus RTU link**

• **2 threshold relays**

Local alarm

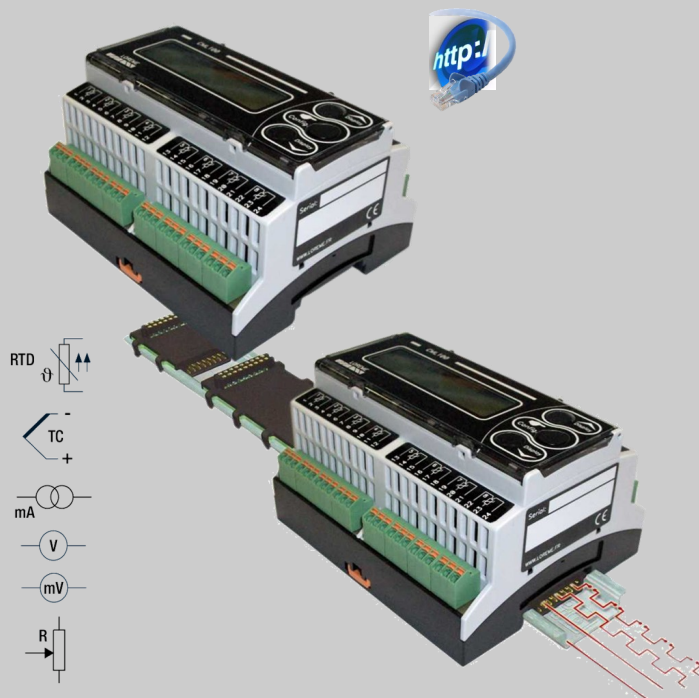

CML100 is a multi channel analog signals measurement unit, allowing the acquisition of temperature, process signals or alternative current (via Tio transformer). Measurements are available over Ethernet (Modbus TCP) or over RS485 (Modbus RTU). The internal Bus (embeddable in DIN rail) allows up to 8 modules aggregated on one Ethernet link.

Description :

Inputs (dedicated models available) :

- * 8 Pt100 sensors in 3 wires connexion
- * 16 Pt100 or Pt1000 sensors in 2 wires connexion
- * 16 CTN sensors (R0 and Beta parameters are user configurable)
- * 16 Thermocouples (configurable : J,K,S,T)
- * 16 voltage inputs 0..1...5..10 Volts
- * 16 current inputs 0..4....20 mA
- Other available inputs : Ni100 , Baco500 , Cu10 ,
- All inputs are with common ground (isolated from communication)

Front face :

- LCD display with 2 lines of 16 characters (back-lighted).
- Three push buttons for display and configuration.

Alarms : (option)

- 2 alarms per measure channel configurable:
 Threshold, direction, hysteresis and delay, breaking detection
- These alarms respectively control two relays, common to all channels.
 Each relay can be configured for positive or negative security (NO / NC)

Feature:

- symmetrical DIN rail mounting
- Connection on spring terminal block (max section 1.5 mm²)
- Conformal coating.
- Protection rating: IP20


Configuration:

The device can be configured via the front panel or with the serial RS232.
 USB - RS232 cable supplied separately .
 Firmware update is possible via this serial link

Communication (option):

- Ethernet : Modbus TCP 10/100 T base (RJ45 connection)
- Modbus RS485 (connection on screw terminal)

BUS composition on the DIN rail: 1 master and up to 7 slaves

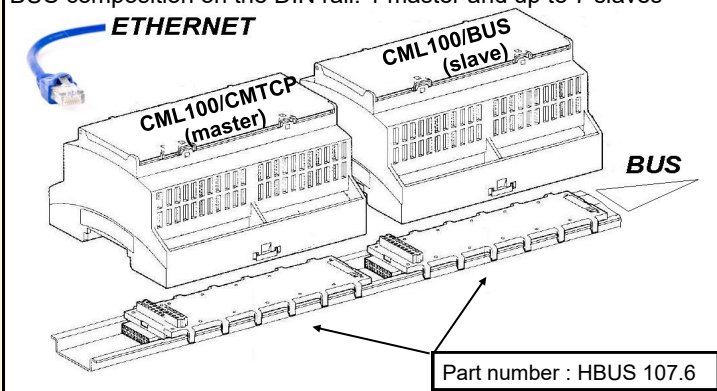

Version and order code:

CML100t-8-3f	: 8 Pt100 sensors in 3 wires connexion
CML100t-16-2f	: 16 Pt100 or Pt1000 sensors in 2 wires connexion
CML100ctn-16-2f	: 16 CTN sensors in 2 wires connexion
CML100tc-16	: 16 thermocouples J,K,S,T
CML100mA-16	: 16 current inputs : 0..4....20 mA
CML100V-16	: 16 voltage inputs : 0..1...5..10 V

Options /R : 2 alarm relays

Communication :

CML100xxxx/CMTCP	Ethernet MODBUS TCP link
CML100xxxx/BUS	Slave version on internal Bus (MODBUS TCP)
(up to 8 modules on the bus : 1 /CMTCP + 7 /BUS)	
CML100xxxx/SNMP	Ethernet link with SNMP protocol
CML100xxxx/CM	RS485 MODBUS 9600 bps link
(no BUS on the DIN rail in MODBUS or SNMP)	

INPUT (16 bits resolution)

Type	Range	Accuracy
Voltage	- 12 Vdc to 12 Vdc	+/- 0.01 V
Input impedance	500 kOhms	

Current (DC)	Range	Accuracy
Input impedance	- 30 mA to 30 mA	+/- 0.01 mA
	50 Ohms	

Pt100 / Pt1000 2, 3 wires -200.....800 °C +/- 0.3 °C
influence of cable resistance: 0.02 °C / ohms (20 ohms max)

The accuracy on 2 wires connection depends on the resistance of the probe wires (offset adjustment is possible).

CTN (R0 and Beta configurable) 0ohms...3Mohms +/- 0.2%

Thermocouples : (configurable) other type on request

Tc J -200.....600 °C +/- 0.4 °C

Tc K -200.....1350 °C +/- 0.5 °C

Tc S 0.....1600 °C +/- 1.5 °C

Tc T -250.....400 °C +/- 0.5 °C

Compensation T° -10 / 60 °C +/- 0.6 °C

thermocouple sensor break detection current = 0.5 uA.

Measure cycle 6 per second

COMMUNICATION

Ethernet 10 /100 T Base, RJ45 connectors

Web server, Modbus TCP Port 502, SNMP

RELAY

Switching power: 250VAC 1A

POWER SUPPLY (to be define on order)

11 to 30 Vdc, 20 to 70 Vac-dc, 80 to 265 Vac-dc (3 VA)

ENVIRONMENT

Operating temperature -20 to 60 °C

Storage temperature -20 to 85 °C

Thermal drift < 0.01 % / °C

Humidity 85 % not condensed

Weight 250 g

Protection rating IP 20

Dielectric strength:

Input/power supply/relay/communication:1500 Vrms continuously
input/input : no isolation, common ground

MTBF (MIL HDBK 217F) > 3 000 000 Hrs @ 25°C

life time > 200 000 Hrs @ 30°C

Electromagnetic compatibility 2014/30/UE / Low Voltage Directive 2014/35/UE

Immunity standard for industrial environments
EN 61000-6-2

Emission standard for industrial environments
EN 61000-6-4

EN 61000-4-2 ESD	EN 61000-4-8 AC MF	EN 55011
EN 61000-4-3 RF	EN 61000-4-9 pulse MF	
EN 61000-4-4 EFT	EN 61000-4-11 AC dips	group 1
EN 61000-4-5 CWG	EN 61000-4-12 ring wave	class A
EN 61000-4-6 RF	EN 61000-4-29 DC dips	



WIRING AND OUTLINE DIMENSIONS:

Synopsis:

