

Voltage presence relay for capacitive divider RPT23



• AC and DC voltage monitoring

TRMS measure

Voltage presence and absence detection thresholds
for single-phase, three-phase networks or DC voltage

• Direct measurement or via capacitive divider or transformer

High input impedance

compatible with neon indicators on capacitive voltage divider output

• Display voltages and status indicators for fast diagnostic

• Fully configurable with pushbutton under the front panel

• Auxiliary power supply universal 20...265Vac-dc



The RPT23 relay associated for example with an capacitive voltage divider, control the presence or absence of AC voltage on medium or high voltage network.
It can be used for indicating any change in network status.

Description:

The effective voltage of the three phases are measured via a high impedance circuit, and compared with the internal thresholds to detect the voltage presence or absence.

The relays outputs evolve following this comparison (after application of a programmed delay). The algorithm is defined as follows:

voltage loss = absence of all three voltages
(value under the absence threshold)

voltage presence = presence of at least one voltage
(value above the presence threshold)

The 2 relays outputs are complemented:

Relay 1 is activated in voltage presence (presence of one voltage)

Relay 2 is activated on voltage absence (loss of the 3 voltages)

Making it possible to select the wanted safety operating on loss of the module supply voltage or on module dysfunction.

Validate on site by EDF for medium voltage stations.

(comply with all requirements)

General characteristics:

- Low detection (voltage absence)
- High detection (voltage presence)
- Configurable response time from 0.15 to 60 seconds
- Display of divider or transformer output voltage
- Led status indicators of each phase.
- Auxiliary power supply: 20...265 Vac/dc

Features:


- DIN rail mounting (symmetrical)
- Connection on screw terminal block (up to 2.5 mm²)
- Pluggable terminal blocks
- Conformal coating
- Protection rating (enclosure/terminal blocks) IP20

Functional security data: hardware

component type B , HFT = 0

$\lambda f = 239$ fit , DC = 87.8 % , PFH : 16 to 21 fit , SFF = 92 %

Synoptic: (example of use)

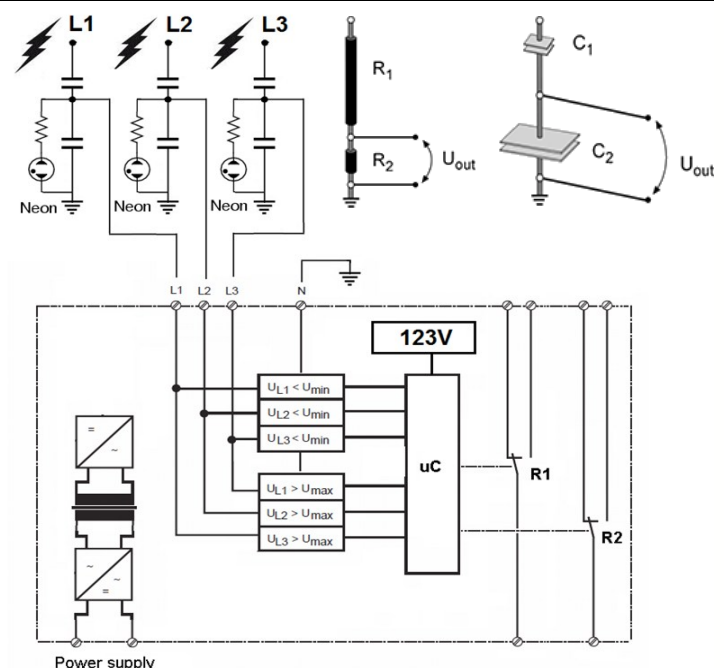

Versions and order code:

RPT23 : 2 complementary output relays (changeover contact)
auxiliary power supply 20 ... 265Vac-dc



option /SIL2 SIL2 version hardware only

AUXILIARY POWER SUPPLY

Adjustable threshold range:
Voltage presence: from 10 to 500 Vac-dc
Voltage absence: from 10 to 500 Vac-dc
Wiring : 3 wires (L1,L2,L3) + neutral
Current draw: < 0.1 mA @ 100Vac
Input impedance: > 1.4 Mohms

Potential free changeover contact

Isolation	2500 Vac
Impulse withstand voltage	6000 V (1.2 / 50 μs)
switching power AC	440 Vac / 6Aac, 1500VA
switching power DC	300 Vdc / 0.15 Adc
Load type	life time (number of operations)
5 A, 250 Vac, resistive	1x10 ⁵
2 A, 250 Vac, cos phi 0.4	2x10 ⁵
1 A, 24 Vdc, L / R=48 ms	2x10 ⁵
6 A, 250 Vac, resistive	7x10 ⁴
3 A, 250 Vac, cos phi 0.4	2x10 ⁵
Programmable response time	0.15 ... 60 seconds



ENVIRONMENT

Operating temperature	-25 to 65 °C
Storage temperature	-40 to 85 °C
Humidity	95 % not condensed
Climatic resistance:	>500 hours at 95% RH in the air at 55 °C

Weight	150 g
--------	-------

Protection rating	IP 20
-------------------	-------

Dielectric strength	2500 Vrms continuous
Insulation resistance	> 2 Gohms @ 1000 Vdc
Measure input/Power supply/Contacts	

MTBF (MIL HDBK 217F)	> 4 200 000 Hrs @ 25 °C
life time	> 200 000 Hrs @ 30 °C

Electromagnetic compatibility 2014/30/UE / Low Voltage Directive 2014/35/UE

Immunity standard for industrial environments EN 61000-6-2		Emission standard for industrial environments EN 61000-6-4	
EN 61000-4-2 ESD	EN 61000-4-8 AC MF	EN 55011	
EN 61000-4-3 RF	EN 61000-4-9 pulse MF	group 1 class A	
EN 61000-4-4 EFT	EN 61000-4-11 AC dips		
EN 61000-4-5 CWG	EN 61000-4-12 ring wave		
EN 61000-4-6 RF	EN 61000-4-29 DC dips		

WIRING AND OUTLINE DIMENSIONS:

