

- **Firing mode**
Phase angle modulation
- **Output power : 600 Watts max**
Current range from 0.1A to 2.5A
Embedded fast fuse
- **Proportional internal setpoint**
Setting by multi-turn trimmer
- **Application :**
Fan speed control
pump flow rates adjustment
motor control
light dimmer,...



The VPL50 is a compact autonomous unit allows a power control of resistive or inductive loads with the phase angle modulated output. Designed for lighting or speed control on small single phase AC motor.

Description:

The VPL50 is conceived with optimized filter cells and "SNUBBERLESS" triac providing a perfect smoothing of output current, and a high decreasing of switching perturbations while improving the product reliability

The absence of mobile mechanical components and mechanical contacts (subject to wear) give to the VPL50 a great robustness, a longer service life, and reduced the maintenance cost (insensitive to shocks and vibrations).

flexibility in applications:

Phase angle modulation for application with fast dynamic and for precise control.

- Operating frequency 50 - 60 Hz self-adaptive.
 - Setpoint via local multi-turn potentiometer.
 - DIN rail mounting. Natural convection cooling dimensioned to deliver the nominal current at an ambient temperature of 40°C
 - Connection power supply and output on screw terminal blocks (2.5mm² maxi)
- Self-powered, protection with internal RLC circuit and fast fuse.

This product was mainly conceived for resistive or inductive loads, it is mandatory to ensure the compatibility with the inrush current when the load is powered.
An incandescent light have an inrush current of ten times the nominal current for few tens milliseconds.

The short circuit protection is made by an internal fast fuse. Reachable on low side (Fast 3A, 5 x 20mm)


Note: Semi conductors relay have no galvanic isolation between the mains power and the load.
It is necessary to power off the unit before any intervention on the load circuit.

Firing mode:

Phase angle variation

Advantage : Allows a high accuracy control of the load. Suitable for low inertial loads.

Disadvantage: Switching mode is more "noisy". Generates more disturbances.

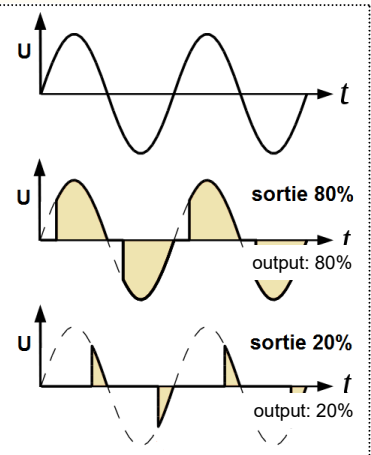

INPUT (internal setpoint)

Multi-turn potentiometer (20 turns) 0.....100%

OUTPUT

Nominal current output: 2,5 A
Permissible overload: 4 A
Peak current (not repetitive): 30A during t=20 ms
I²t (<10ms) (for fuse definition) 50 A²S
Current, min. load <100 mA
Leakage current blocked state: < 2.5mA
voltage dropout: 1.4V
Dissipated power: 3.5 Watts

POWER SUPPLY

230V +/-15% 50 - 60Hz

ENVIRONMENT

Operating temperature -10 °C to 45 °C
Storage temperature -20 °C to 85 °C
Humidity 85 % (not condensing)
Dielectric strength 2500 Vrms continuous
Weight 150 g
Protection rating IP40

dv/dt immunity 400V/us
Horizontal rail mounting recommended for optimum dissipation

Electromagnetic compatibility 2014/30/UE / Low Voltage Directive 2014/35/UE

Immunity standard for
industrial environments
EN 61000-6-2

Emission standard for
industrial environments
EN 61000-6-4

EN 61000-4-2 ESD	EN 61000-4-8 AC MF
EN 61000-4-3 RF	EN 61000-4-9 pulse MF
EN 61000-4-4 EFT	EN 61000-4-11 AC dips
EN 61000-4-5 CWG	EN 61000-4-12 ring wave
EN 61000-4-6 RF	EN 61000-4-29 DC dips

EN 55011
group 1
class A

**WIRING AND OUTLINE DIMENSIONS**